

# weezago

## WEEZAGO SETUP BRIGHTSIGN®



[www.weezago.com](http://www.weezago.com)

# WEEZAGO SETUP / BRIGHTSIGN®

## What do I need?

To configure your display, you will need:

- Serie 3 and Serie 4 BrightSign Player (XT, XD, HD, LS, HO)
- Blank microSD card (Class 10)
- A display with a connected HDMI cable
- A computer connected to the Internet network and equipped with an SD card reader

Minimum Firmware supported :

- Model Series 3 : 7.0.60
- Model Series 4 : 8.0.33

( <https://www.brightsign.biz/downloads/overview> )

- ➡ #1 - **For DHCP network configuration**, please use default Brightsign setup
- ➡ #2 - **For special network configuration**, please follow the network configuration process

## Weezago package installation


- 1 - Download Weezago installation package here : <http://brightsign.weezago.com/setup>
- 2 - Unzip the downloaded files to the root of the SD card.

Your SD card should have the following structure:

- html
- node\_modules
- autorun.brs


- 3 - Insert the SD card into the **powered off** BrightSign player.
- 4 - **Power on** your BrightSign player.

# WEEZAGO SETUP / BRIGHTSIGN®

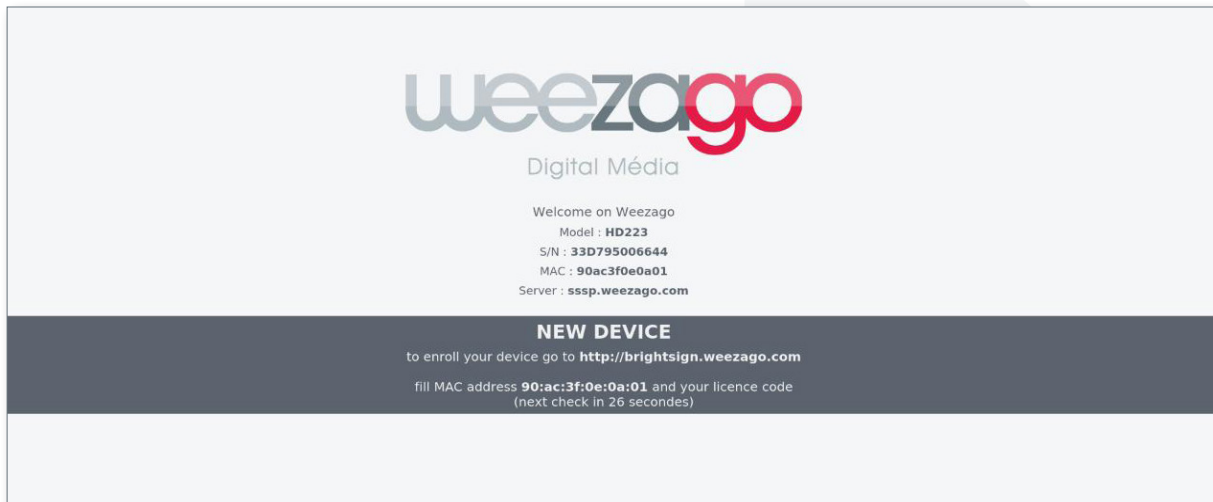

5 - To now register your player on Weezago, connect with your computer at:  
<http://brightsign.weezago.com>

6 - Fill the MAC address, choose the device orientation and fill the Weezago licence code.

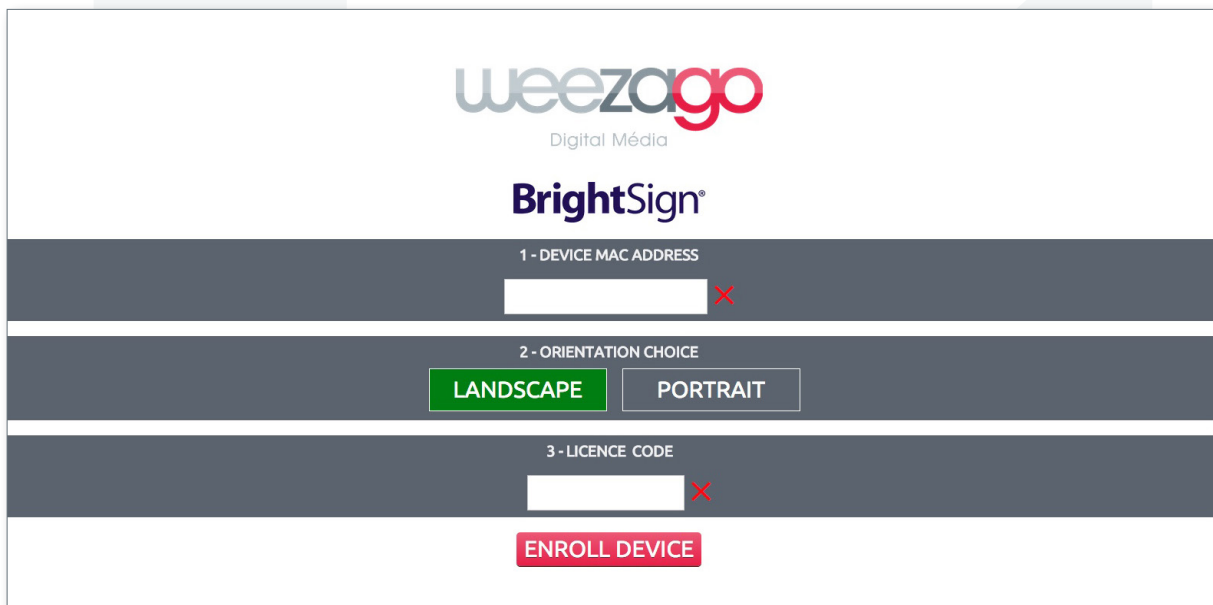

7 - Once the enrollment is completed, the device automatically setup and reboot.

# WEEZAGO SETUP / BRIGHTSIGN®

## BrightSign Network Configuration



Only in the case of a network with fixed IP settings (not DHCP)

- 1 - Go to <http://brightsign.weezago.com/tools>
- 2 - Fill the configuration field according to your network environment.
- 3 - Click on « **GENERATE** » to download the config file « **network.json** ».
- 4 - Copy the file « **network.json** » to the root of the SD card.
- 5 - Reboot the device.
- 6 - The device will automatically change the network configuration and reboot.

